

**SDC**  
**SERIES**

**Description**

The Series SDC connection system is supplied for installation into the outlet ports of most gas use, vent and fill valves on a cryogenic liquid cylinder. The system is a one-piece assembly consisting of a CGA fitting/clutch mechanism permanently mounted in a stainless steel locking bracket. Once installed, this system cannot be removed without rendering the CGA outlet connection unusable.



**Features and Benefits**


- Easily installs on most existing threaded cylinder valves using standard hex wrench.
- NPT Male connection supplied with factory applied PTFE thread sealant tape
- Suitable for both Industrial and Medical Applications
- CGA connections manufactured to industry standards
- Zero external leakage
- Cleaned and Packaged for Oxygen Service
- Optional Integral Anti-Back-Flow Check Valve
- OEM Endorsed

**Materials of Construction**

Component	Material
Fitting Body, Clutch Housing	Brass, ASTM B16
Spherical Locking Pawls	440 SS, ANSI 440C
Springs, Stop Washer	302 SS, ASTM A313
Locking Sleeve, Retaining Pins	304 SS, ASTM A240
Warning Label	4 Mil Laminated Vinyl

# SERIES SDC Self-Locking Liquid Cylinder Connectors

Series SDCC Shown  
Connection with  
Integral Check Valve

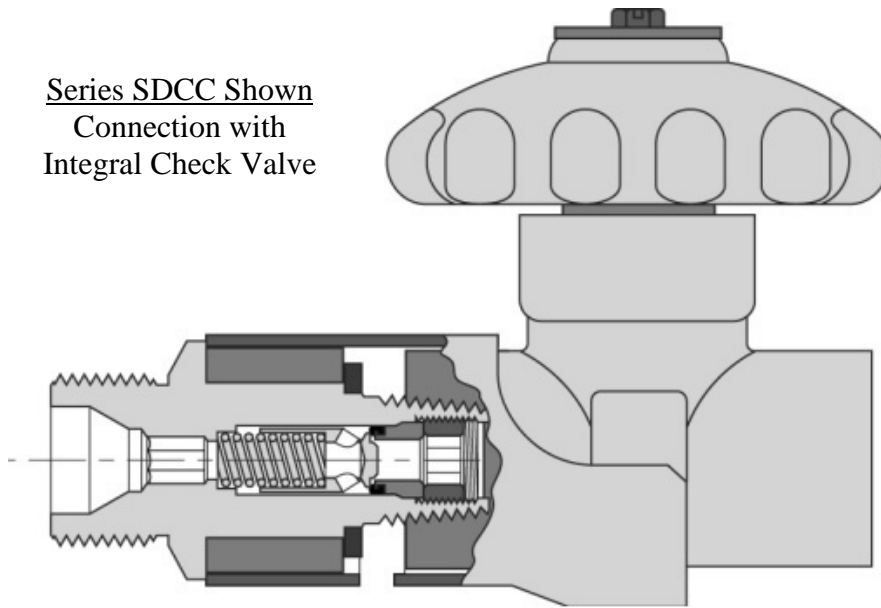

## Ordering Information

SDCC - 3 540 - V

**SERIES**

SDC - Self Locking CGA Connection  
SDCC - Self Locking CGA Connection with  
Integral Check Valve (3320, 3326, 3540, & 3580 only)  
Nominal 1 psi crack pressure.

**INLET**

3 - 3/8" NPT Male  
375 - 3/8" NPT Male Plug (3000 psi) omit outlet designation  
(specify SDC-375)

**OUTLET (MAWP\*)**

540 - CGA-540 (3000 psi)  
320 - CGA-320 (3000 psi)  
326 - CGA-326 (3000 psi)  
580 - CGA-580 (3000 psi)  
440 - CGA-440 (500 psi)  
295 - CGA-295 (500 psi)  
622 - CGA-622 (500 psi)  
624 - CGA-624 (500 psi)

\* as defined in CGA V-1 Standard for Compressed Gas Cylinder Valve Outlet and Inlet Connections

**SEAL MATERIAL**

V - Viton™, -10°F to 375°F (-23°C to 190°C)  
B - Buna-N, -40°F to 250°F (-40°C to 121°C)  
N - Neoprene, -40°F to 300°F (-40°C to 148°C)  
EP - Ethylene Propylene, -65°F to 300°F (-54°C to 148°C)  
FS - Fluorosilicone, -80°F to 350°F (-62°C to 176°C)

Note: Viton™ is a trademark of DuPont.

PROPER COMPONENT SELECTION – When specifying a component, the total system design must be considered to ensure safe and trouble-free performance. Intended component function, materials compatibility, pressure ratings, installation, environment and maintenance are the responsibility of the system designer.



[www.generant.com](http://www.generant.com)

1865 Route 23 South PO Box 768 Butler, New Jersey 07405 973.838.6500 Fax 973.838.4888